

R320

Standard bucket capacity: 1.75m³ | Rated power: 194kW/2200rpm |

Operating weight: 29600kg



RIPPA

Keep evolving for the better

Rippa Machinery Group Co., Ltd. was established in 2006 and has passed the EU CE ISO9001 certification. It has been awarded the title of "Contract abiding and Reputable" in Shandong Province. The company has a domestic sales department and an international business unit, and the enterprise is developing towards diversification, multi industry, and collectivization

We are Rippa

Rippa is a brand renewal and upgrade, reflecting our core concept of sustainable development and leaving a positive development footprint. Looking ahead, we will continue to provide innovative products and solutions to drive continuous progress in our world today.

NEWPOWER

Equipped with Cummins engines, providing more power support for driving. With a gentle roar, elegant start, strong and stable output power, it has been proven by the market.



REDUCE FUEL CONSUMPTION




The above data are all obtained under ideal testing conditions, and there may be some deviations from the actual testing data for reference only.

Fully electronic hydraulic system

By electronically controlling the main pump and valve, precise control of hydraulic output is achieved, reducing system energy consumption losses and significantly reducing excavator fuel consumption.

Upgraded system

The fully upgraded system adjusts the engine speed and main pump output torque in real time according to the intensity of the working conditions, making energy consumption control more precise and the fuel saving effect more obvious.

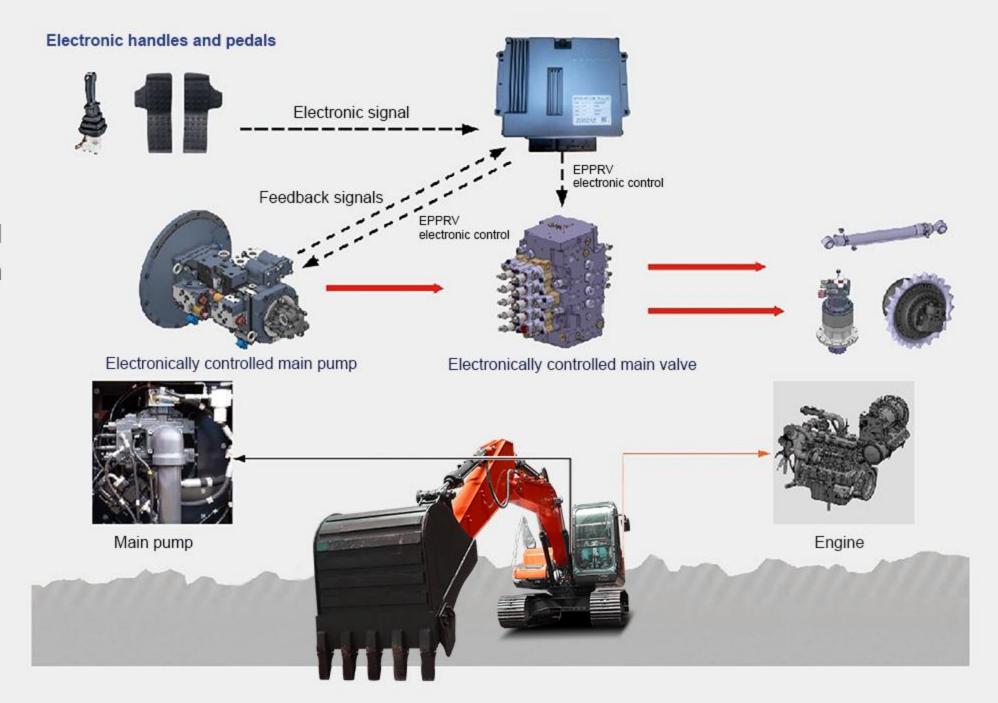





POWER SYSTEM

It uses Cummins engines, which have high power and high performance of core components, and continue to maintain the performance advantages of the previous generation products; the engine cylinder combustion temperature is high, the fuel efficiency is significantly improved, and the power is strong; the exhaust emissions are environmentally friendly.



HYDRAULIC SYSTEM

Multiple oil filtration systems such as hydraulic oil pumps enhance fuel filtration performance, greatly increase fuel usage, reduce energy consumption losses in the system, effectively reduce fuel consumption, and save 7% fuel compared with the previous generation model.



HEAVY DUTY LARGE AND SMALL ARMS

The large and small arm links are strengthened, the plates are thickened, and the manufacturing process is improved. The welding type is replaced by the integrated casting type.



CENTRAL SWING MOTOR

The central slewing motor is made of foreign famous brands, with stable performance and durability.



Multifunctional electronic instruments

- **a.** Fuel consumption management: It can confirm the amount of oil and changes in hydraulic oil in the dashboard, and can also initialize the usage time and change the maintenance product replacement cycle
- **b.** Engine parameters: engine revolutions can be displayed on the instrument panel
- C. Machine voltage: The voltage can be viewed on the instrument panel
- d. Warning message confirmation: Equipment warning messages can be confirmed on the dashboard.

COMFORTABLE AND SAFE DRIVING ENVIRONMENT

CENTRALIZED BUTTON DESIGN

a.Rotary throttle

 The rotary throttle has high precision, strong operation and more beautiful appearance.

c. auxiliary button

 The centralized design of auxiliary buttons greatly improves the convenience of equipment operation.

b.air conditioning panel

 The centralized design of the air conditioning panel can adjust the comfortable working environment according to the environment.

d.power supply unit

 12V USB power supply device for charging, can provide safe charging for mobile phones and other small devices











COMPREHENSIVE UPGRADE OF DRIVING QUALITY IMPROVED RIDE AND TACTILITY

Comfort seat pilot operation

a.shock absorbing seat

Optimization and improvement of cab shock absorption effect to reduce fatigue caused by operation

b.Operating handle


Rounded handle, comfortable to hold, strong operability and more precise operation control

c.Security lock

Equipped with safety lock for safer operation





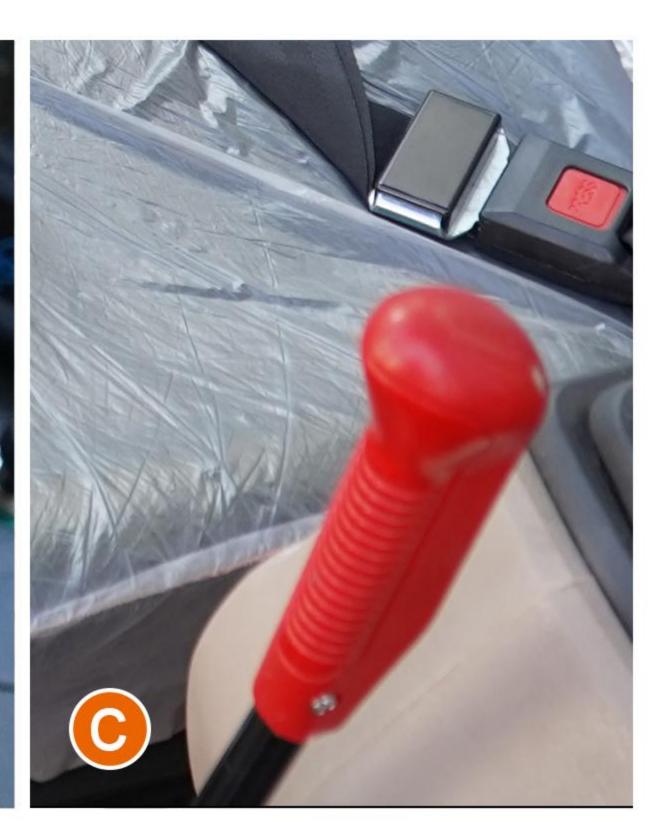

CONVENIENT, FAST AND ECONOMICAL MAINTENANCE

New and convenient maintenance settings provide customers with convenient and fast usage conditions.






RELIABLE AND CONVENIENT MAINTENANCE SYSTEM

The engine cover adopts humanized design

Continuing the design of maintenance convenience, repairs or inspections can be easily completed.

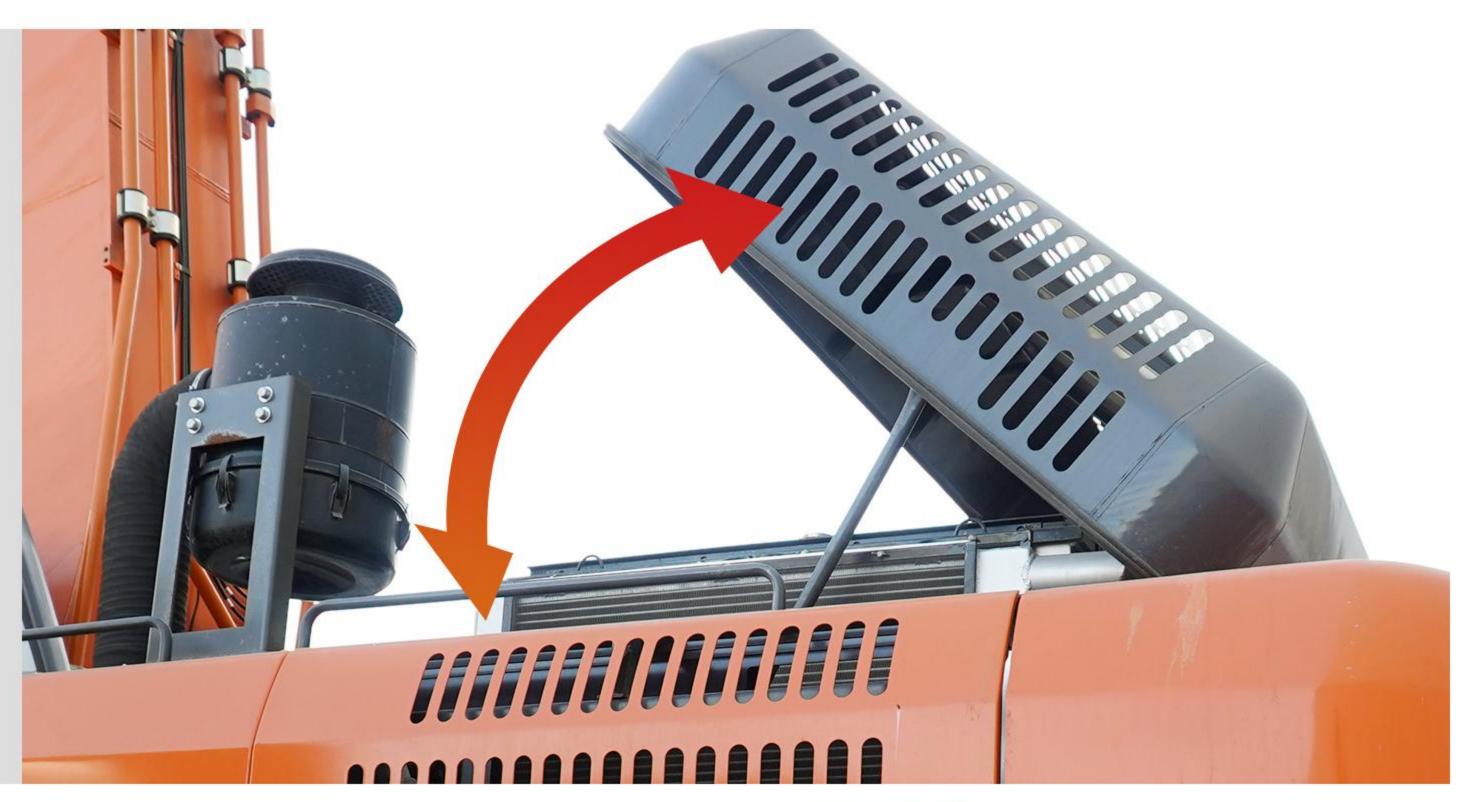











1.Big and small arms

The large and small arm links are strengthened, the plates are thickened, and the manufacturing process is improved. The welding type is replaced by the integrated casting type.

2.Cab protective cover can be installed

The high-strength and thickened protective net can effectively prevent stones from splashing during mining operations, making operations and driving safe and reliable.

3.Oil cylinder

The hydraulic oil cylinder with strengthened design and integrated design can reduce welding seams and prevent the oil cylinder from breaking easily.

5.Reinforced boom cylinder support

The cylinder support adopts a thickened and double-layer reinforced structure to effectively cope with the impact of crushing operations.

4. Reliable weight bracket


The stronger counterweight bracket design can permanently protect the core components from damage, and the thickened cover plate and super-durable fixing bolts ensure its safety and stability.

MAIN SPECIFICATIONS

Model		R320
/lachine working weight	lb (kg)	65120 (29600)
Bucket capacity	ft³ (m³)	22.2 -61.8 (0.63-1.75)
Boom length	in (mm)	245.9 (6245)
Arm length	in (mm)	98.4 (2500)
Slewing speed	(rpm)	(10.1)
ravel speed	mph (km/h)	1.9-3.1 (3.0-5.0)
Bucket digging force	lbf (kn)	42264-44939 (188-199.9)
Arm digging force	lbf (kn)	35025-44939 (155.8-199.9)
Cab height	in (mm)	120.7 (3065)
ail slewing radius	in (mm)	126 (3200)
Counterweight level	in (mm)	46.3 (1175)
rack length	in (mm)	194.1 (4930)
rack width	in (mm)	126 (3200)
rack shoe width	in (mm)	23.6 (600)
/linimum ground clearance	in (mm)	19.7 (500)
laximum digging range	in (mm)	399.8 (10155)
/laximum digging range on the ground	in (mm)	391.7 (9950)
/laximum digging depth	in (mm)	247 (6275)
/laximum unloading height	in (mm)	274 (6960)
laximum vertical wall depth that can be dug	in (mm)	211.4 (5370)
Engine		Cummins 6CTAA8.3
Power	hp (kw)	260 (194)
lulti-way valve		HF
Hydraulic pump		Nakagawa/Kawasaki
ravel motor		ZHTE
Slewing motor		ETON



Exclusive quality: RIPPA care

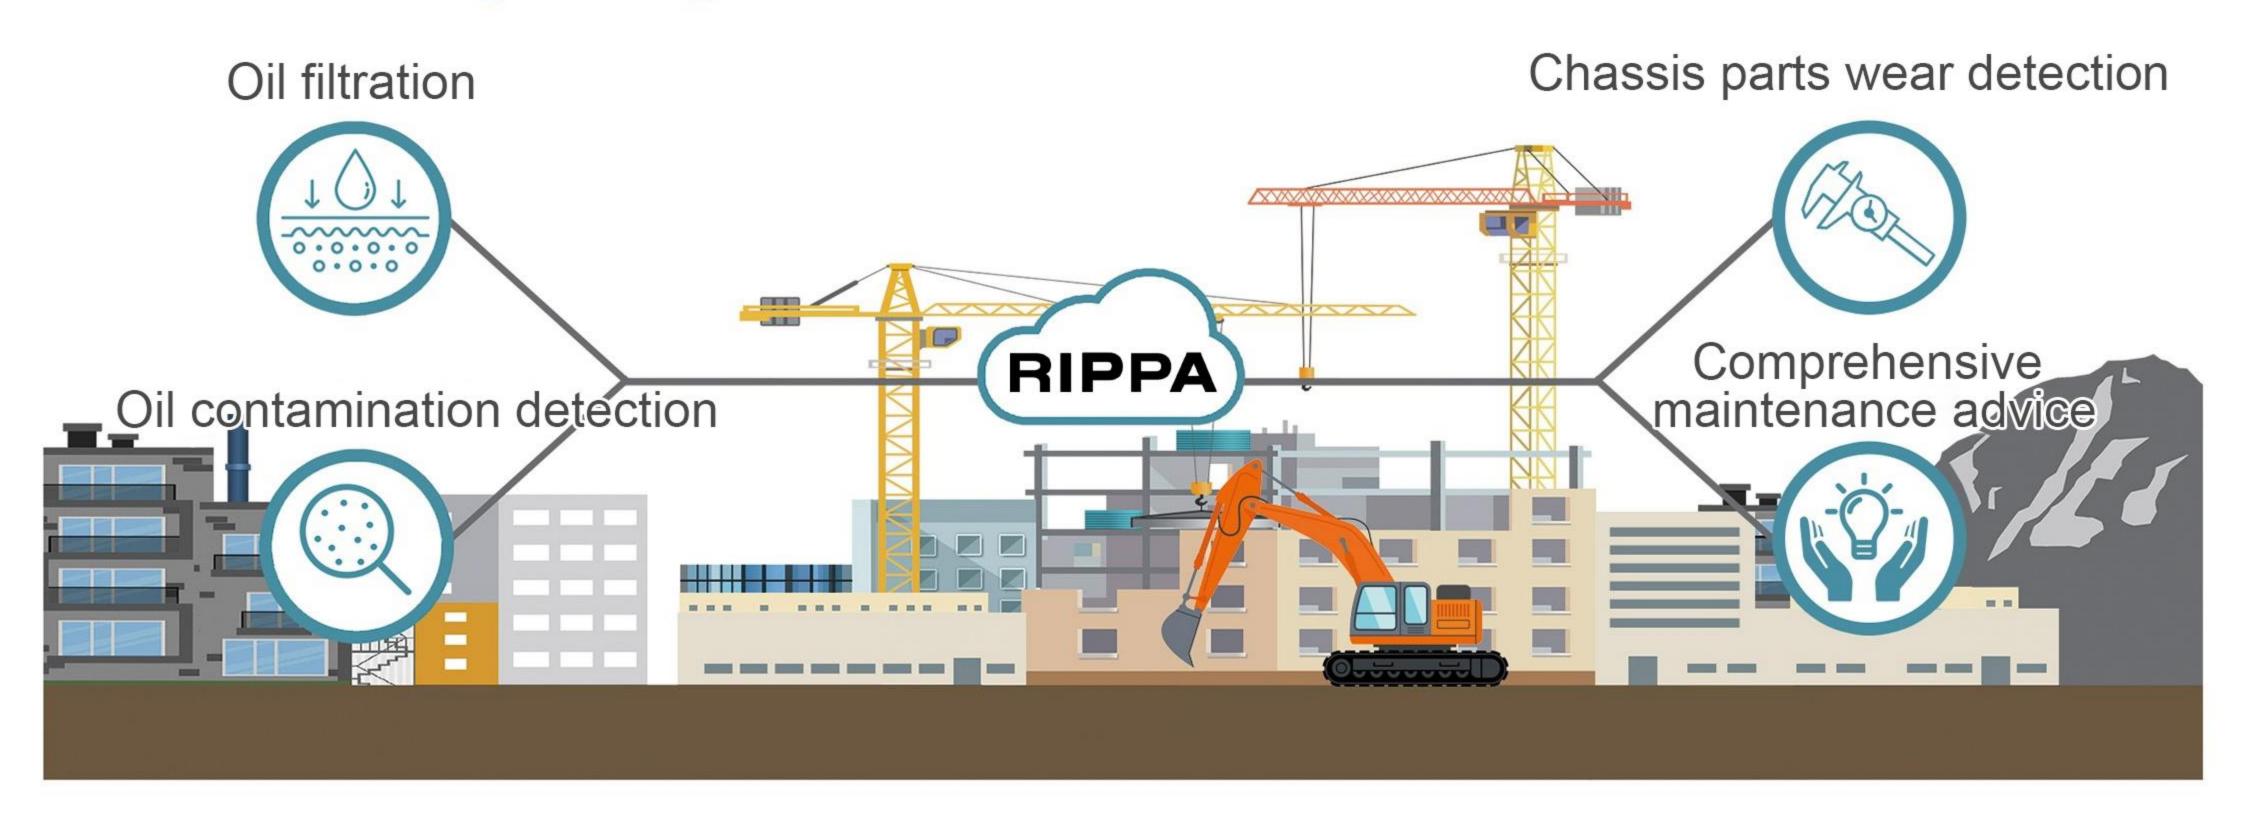

Personal service and worry-free maintenance



Fuel sulfur content testing

Help customers identify good and bad fuels and require the use of fuels with a sulfur content of less than 10 ppm.




Urea concentration detection

To help customers identify good and bad urea, it is required to use a urea solution with a concentration of 32. $5\% \pm 0.7\%$.




Post-processing maintenance training

Help customers understand correct operation and maintenance methods to avoid misjudgments and failures caused by improper operation.



DPF cleaning

During the warranty period, free cleaning service will be provided when a post-processing failure occurs for the first time.

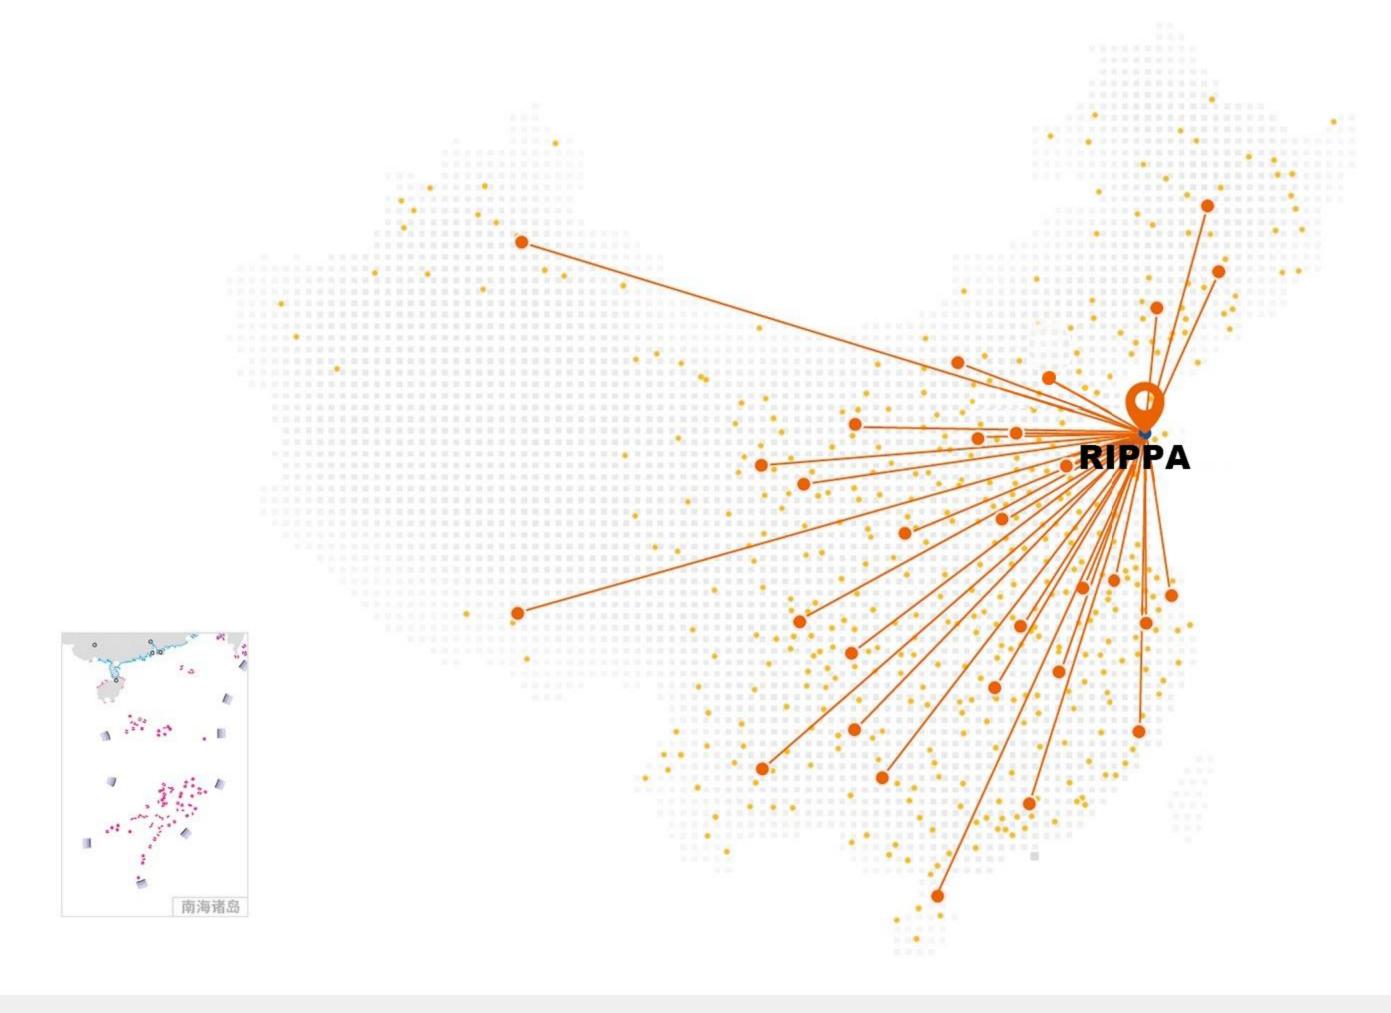

Nationwide sales and service network

RIPPA is always committed to providing customers with high-quality product after-sales service and support, and customized solutions can maximize customer needs.

RIPPA Jining

Dealer/Direct Sales

Service outlets



online customer service)



Troubleshooting











Intelligent service data system

WE ARE RIPPA

Shandong Rippa Machinery Group Co., Ltd. is located in the Sixth Industrial Park, Jining high tech Zone, Shandong Province. It is a state-level high-tech enterprise with the right to import and export;

The company's employees are vigorous and enterprising, constantly creating the legend and glory of Rippa!

Powered by cummins





Add: No.6 Industrial Park, Chongwen Avenue 2166, Gaoxin District, Jining City, Shandong Province



www.rippa.com